



Engine PTO **PF612** for **VOLVO D11** Engines

**HIGH LEVEL
PERFORMANCE**
BOTH STATIONARY
AND MOBILE MODE

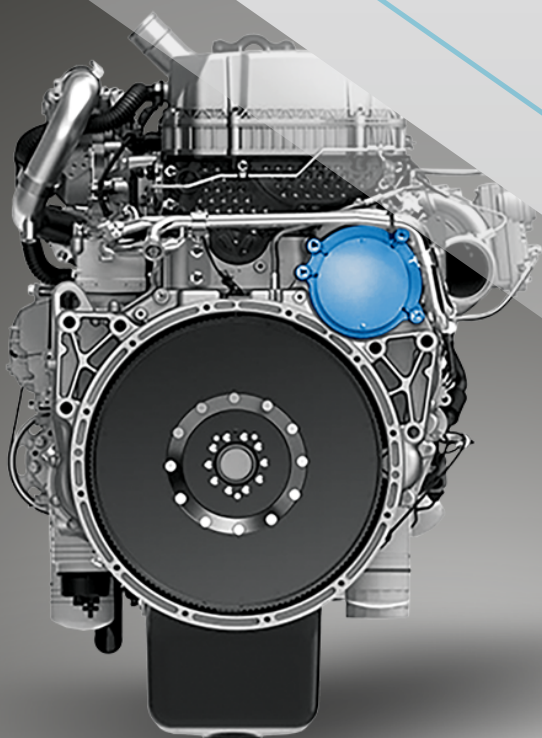


Please, contact us
directly or alternatively
contact one of our
Certified Distributors
for any further
information

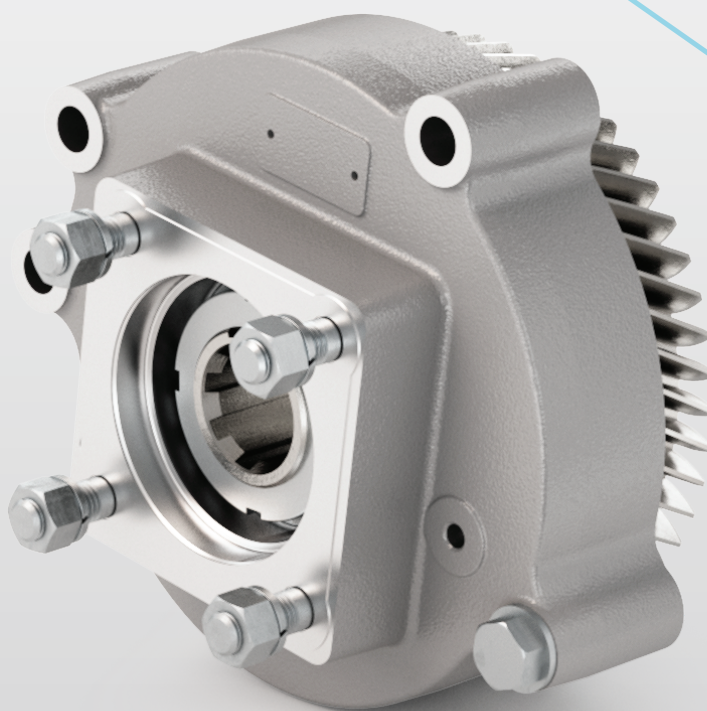

PF612

STANDARD OUTPUT VERSION ISO 14 (PUMP)

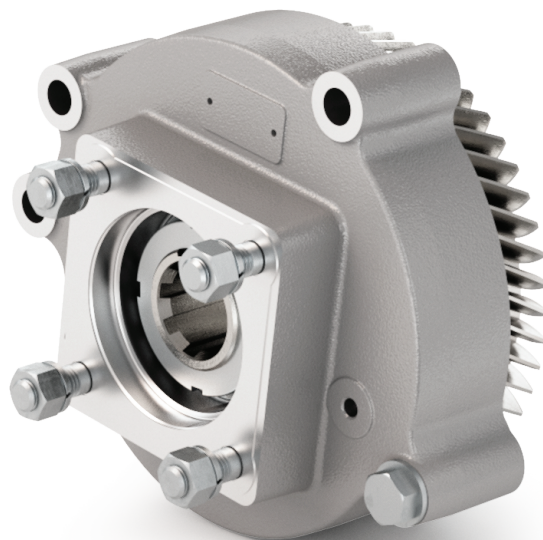

FEATURES AND BENEFITS

**Power Take-Off constant mesh
always rotating while engine on.**

TARGET MARKETS

- Dumper
- Crane-equipped vehicle
- Cement mixer
- Refrigerator/freezer units
- Container lift/load exchange
- Refuse collection
- Snow plough/salt spreader

SPECIFICATIONS AND TECHNICAL DATA

- Suitable for Volvo 6 cylinders in line engines - D11 (10,8 litres)
- Gear ratio (engine/pto output): 1:1.08
- Max available torque: 600 Nm
- Ordering code PF061200000294 (stud kit NOT included)
- PTO output rotation: anticlockwise
(pump rotation: clockwise)

OUTPUT VERSIONS

Output standard: ISO 14 (pump)

Flange options: DIN 00
DIN 10
SPICER 1120
SPICER 1300
SPICER 1400