
INTERPUMP HYDRAULICS


NEW PRODUCT

006/2024 - REV. 0 | AVAILABLE NOW

Engine PTO PF613 for VOLVO D13 - D16 Engines

HIGH LEVEL PERFORMANCE
BOTH STATIONARY AND MOBILE MODE

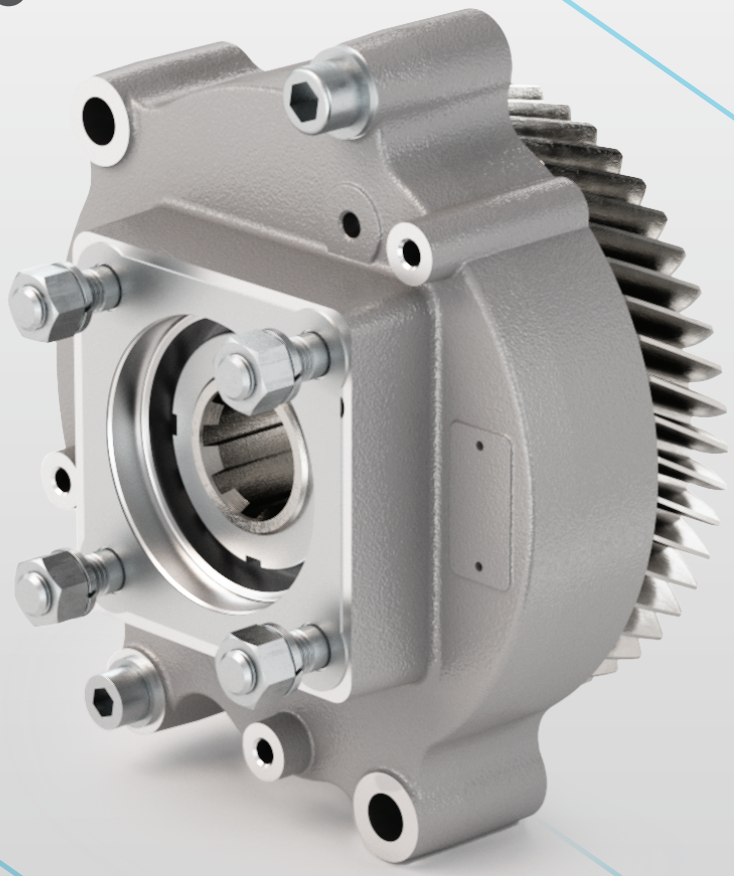

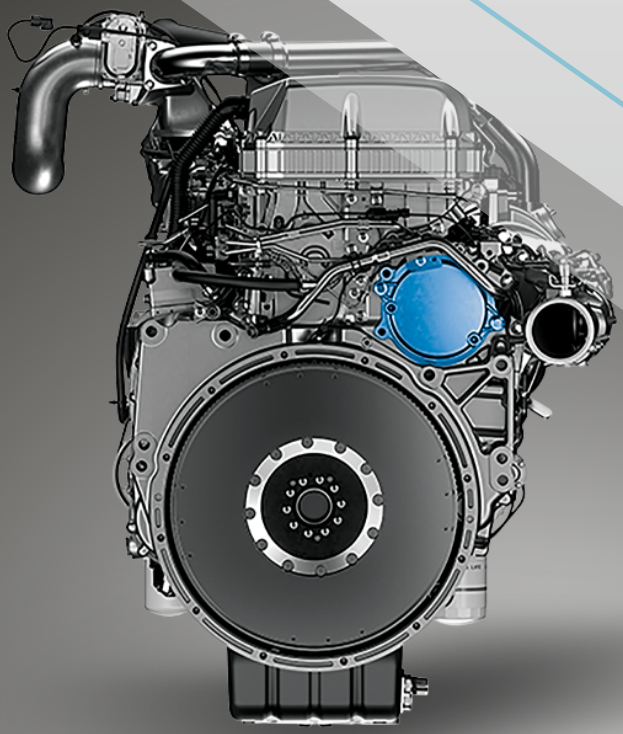

Please, contact us directly or alternatively contact one of our Certified Distributors for any further information

Headquarters
INTERPUMP HYDRAULICS S.p.A.
Via A. Mingozzi, 6
40012 Calderara di Reno (BO) ITALY


P +39 051 6460511
E info@iph.it
W iph.it

A member of INTERPUMP GROUP

006/2024 - REV. 0 | AVAILABLE NOW

PF613

STANDARD OUTPUT VERSION ISO 14 (PUMP)

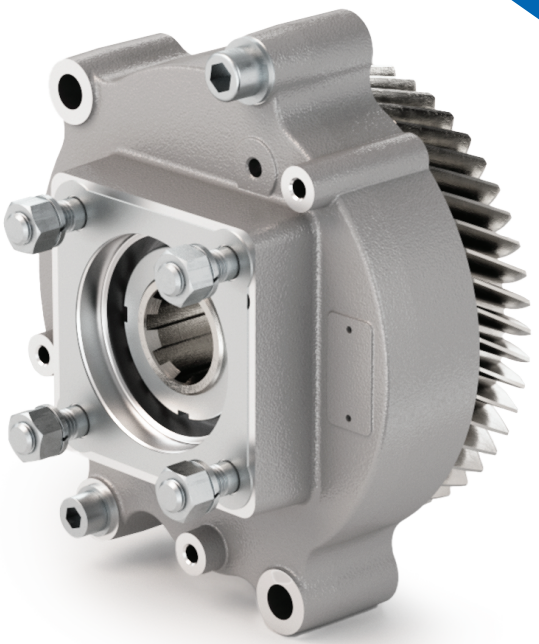

FEATURES AND BENEFITS

Power Take-Off constant mesh always rotating while engine on.

TARGET MARKETS

- Dumper
- Crane-equipped vehicle
- Cement mixer
- Refrigerator/freezer units
- Container lift/load exchange
- Refuse collection
- Snow plough/salt spreader

SPECIFICATIONS AND TECHNICAL DATA

- Suitable for Volvo 6 cylinders in line engines - D13 (13 litres) and D16 (16 litres)
- Gear ratio (engine/pto output): 1:1.26
- Max available torque: 600 Nm
- Ordering code PF061300000294 (stud kit NOT included)
- PTO output rotation: anticlockwise (pump rotation: clockwise)

OUTPUT VERSIONS

Output standard: ISO 14 (pump)

Flange options:
DIN 00
DIN 10
SPICER 1120
SPICER 1300
SPICER 1400

IPH si riserva il diritto di apportare senza alcun preavviso qualsiasi modifica alle caratteristiche tecniche indicate nel presente catalogo. I dati ivi riportati non sono vincolanti.

IPH reserves the right to modify the technical data listed without notice, the aforementioned data are not binding.